


LED Emergency Kit

- ▶ Compatible with all LED Drivers
- ▶ Over 50,000 hours life expectancy
- ▶ 5 year warranty (2 years on battery)
- ▶ Compact

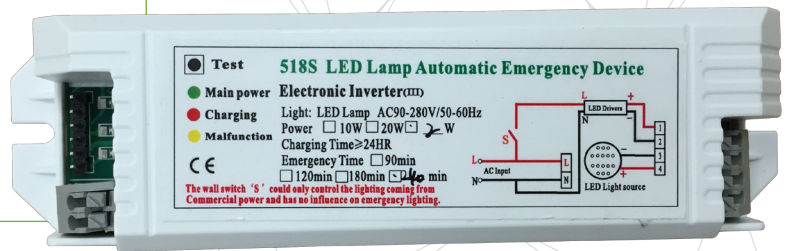

These emergency Drivers are designed to enhance the complete range of LED light fittings. Unique in the market, the full range of New Vision light fittings can be converted to emergency using a simple 'plug and play' emergency module. Just two cost effective models cover the complete range.

Compliance

EMC Directive

EN55015:2013
EN61547:2009
EN61000-3-2:2006+A1:2009+A2:2009
EN61000-3-3:2013

Low Voltage (safety) Directive

EN62493:2010

Performance for LED Drivers

EN62384

Standard Specifications

Models	DRV-EMG-S01-N01	DRV-EMG-S02-N01
Output Current (DC)	60mA	120mA
Output Voltage (DC)	27V	
Output Power	1.5W	3W
Battery	Intergrated	External
Operation time (on full charge)	>4hrs	
Input Voltage	Input 100-240Vac 50/60Hz	
Input Current (@240Vac)	5.5mA	
Input Current (on charging)	50mA (100hrs charging time)	
Power Factor	0.41	
Battery Capacity	2,800mAh (3.6V)	6,000mAh (3.6V)
Operating temperature	-25C to 50C	
Total Life expectancy	50,000 hours (MTBF)	
Warranty	5 Years	



For more information please contact:

Energys Group

Specialists in low carbon retrofit technologies

Franklyn House, Daux Road
Billingshurst, West Sussex RH14 9SJ
United Kingdom

TEL +44 (0)1403 786212

FAX +44 (0)1403 787439

EMAIL info@energysgroup.com

www.energysgroup.com